



תכונות הקפיציות לסוג A

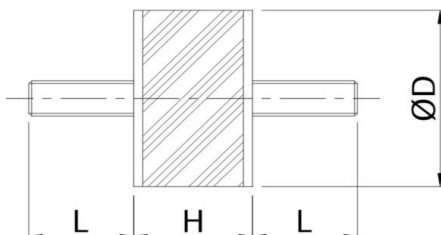

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
6.6	4.6	2.5	0.6	17.7	12.1	4.3	0.3	8/8
13.2	9.1	5.0	1.2	35.4	24.1	8.5	0.6	
19.8	13.7	7.6	1.8	53.0	36.2	12.8	0.9	
9.0	6.2	3.5	0.7	25.9	17.9	8.9	0.4	10/10
18.0	12.4	6.9	1.4	45.4	31.4	15.5	0.7	
27.0	18.6	10.4	2.1	71.4	49.3	24.4	1.1	
23.1	16.0	8.9	1.2	58.7	36.1	16.9	0.6	15/15
46.2	32.0	17.8	2.4	117.0	72.2	33.8	1.2	
69.2	48.1	26.7	3.6	176.0	108.0	50.6	1.8	
40.2	26.1	14.4	1.1	113.0	78.3	50.0	0.6	20/15
80.5	52.1	28.9	2.2	206.0	144.0	91.7	1.1	
121.0	78.2	43.3	3.3	319.0	222.0	142.0	1.7	
38.7	26.7	14.8	1.6	98.0	66.7	40.0	0.8	20/20
77.3	53.3	29.7	3.2	196.0	133.0	80.0	1.6	
116.0	80.0	44.5	4.8	294.0	200.0	120.0	2.4	
64.0	44.7	23.1	1.6	158.0	111.0	68.7	0.8	25/20
128.0	89.4	46.3	3.2	316.0	222.0	138.0	1.6	
192.0	134.0	69.4	4.8	474.0	333.0	206.0	2.4	
92.2	63.8	35.5	1.6	239.0	164.0	107.0	0.8	30/20
184.0	128.0	71.0	3.2	477.0	327.0	214.0	1.6	
277.0	191.0	107.0	4.8	715.0	491.0	321.0	2.4	
92.3	63.8	35.4	2.6	202.0	140.0	79.9	1.3	30/30
185.0	128.0	70.8	5.2	404.0	280.0	160.0	2.6	
277.0	191.0	106.0	7.8	607.0	420.0	240.0	3.9	

* יתכן סטייה של עד 20%± בערכים המצוינים עקב טולרנסים ביצור וקשיות.


תכונות הקפיציות לסוג A

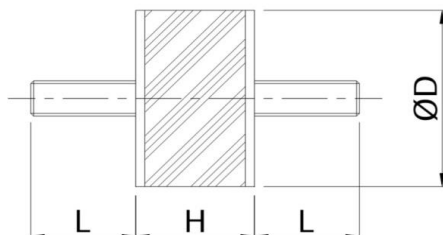

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
164.0	113.0	58.7	2.6	394.0	250.0	170.0	1.3	40/30
328.0	226.0	117.0	5.2	788.0	500.0	341.0	2.6	
492.0	340.0	176.0	7.8	1,182.0	749.0	511.0	3.9	
164.0	113.0	62.9	3.6	353.0	244.0	152.0	1.8	40/40
327.0	226.0	126.0	7.2	705.0	487.0	304.0	3.6	
491.0	340.0	189.0	10.8	1,058.0	731.0	456.0	5.4	
257.0	177.0	99.0	1.6	1,289.0	800.0	432.0	0.8	50/20
513.0	354.0	197.0	3.2	2,578.0	1,600.0	865.0	1.6	
770.0	531.0	296.0	4.8	3,866.0	2,400.0	1,297.0	2.4	
256.0	177.0	99.0	2.6	743.0	516.0	286.0	1.3	50/30
513.0	354.0	197.0	5.2	1,486.0	1,031.0	571.0	2.6	
769.0	531.0	296.0	7.8	2,229.0	1,547.0	857.0	3.9	
276.0	177.0	99.0	3.6	666.0	471.0	265.0	1.8	50/40
551.0	354.0	198.0	7.2	1,332.0	941.0	530.0	3.6	
826.0	531.0	297.0	10.8	1,998.0	1,412.0	795.0	5.4	
256.0	177.0	98.3	4.6	613.0	399.0	237.0	2.3	50/50
511.0	354.0	197.0	9.2	1,227.0	797.0	473.0	4.6	
767.0	531.0	295.0	13.8	1,840.0	1,196.0	710.0	6.9	
502.0	347.0	188.0	3.9	1,467.0	975.0	541.0	2.0	70/40
1,004.0	693.0	376.0	7.8	2,861.0	1,902.0	1,055.0	3.9	
1,506.0	1,040.0	563.0	11.7	4,328.0	2,878.0	1,595.0	5.9	
576.0	399.0	221.0	3.4	1,839.0	1,278.0	708.0	1.7	75/40
1,151.0	797.0	442.0	6.8	3,679.0	2,556.0	1,416.0	3.4	
1,727.0	1,196.0	664.0	10.2	5,518.0	3,835.0	2,124.0	5.1	

* יתכן סטייה של עד 20% בערכים המצוינים עקב טולרנסים ביצור וקשיות.


תכונות הקפיציות לסוג A

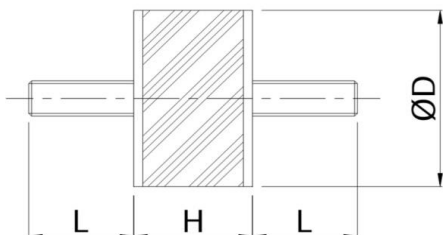

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
573.0	398.0	221.0	4.4	1,618.0	1,114.0	620.0	2.2	75/50
1,145.0	796.0	442.0	8.8	3,235.0	2,229.0	1,239.0	4.4	
1,718.0	1,195.0	663.0	13.2	4,853.0	3,343.0	1,858.0	6.6	
576.0	398.0	221.0	4.9	1,598.0	1,098.0	610.0	2.5	75/55
1,151.0	796.0	442.0	9.8	3,132.0	2,152.0	1,195.0	4.9	
1,727.0	1,194.0	663.0	14.7	4,730.0	3,250.0	1,804.0	7.4	
1,023.0	708.0	393.0	3.2	4,661.0	3,127.0	1,576.0	1.6	100/40
2,047.0	1,416.0	786.0	6.4	9,322.0	6,254.0	3,153.0	3.2	
3,070.0	2,124.0	1,179.0	9.6	13,983.0	9,381.0	4,729.0	4.8	
1,024.0	572.0	393.0	4.2	3,433.0	2,380.0	1,344.0	2.1	100/50
2,048.0	1,143.0	786.0	8.4	6,867.0	4,759.0	2,689.0	4.2	
3,072.0	1,715.0	1,179.0	12.6	10,300.0	7,139.0	4,033.0	6.3	
843.0	708.0	393.0	4.7	3,200.0	2,268.0	1,273.0	2.4	100/55
1,686.0	1,416.0	786.0	9.4	6,267.0	4,441.0	2,492.0	4.7	
2,529.0	2,124.0	1,179.0	14.1	9,467.0	6,709.0	3,765.0	7.1	
1,023.0	708.0	393.0	5.2	3,017.0	2,093.0	1,141.0	2.6	100/60
2,046.0	1,415.0	786.0	10.4	6,035.0	4,185.0	2,282.0	5.2	
3,068.0	2,123.0	1,179.0	15.6	9,052.0	6,278.0	3,422.0	7.8	
1,022.0	708.0	393.0	6.7	2,800.0	1,939.0	1,044.0	3.4	100/75
2,045.0	1,416.0	786.0	13.4	5,518.0	3,821.0	2,058.0	6.7	
3,067.0	2,124.0	1,178.0	20.1	8,319.0	5,761.0	3,102.0	10.1	
2,300.0	1,382.0	880.0	6.6	7,381.0	4,094.0	2,835.0	3.3	150/75
4,601.0	2,764.0	1,795.0	13.2	14,762.0	8,190.0	5,671.0	6.6	
6,901.0	4,146.0	2,693.0	19.8	22,142.0	12,285.0	8,506.0	9.9	

* יתכן סטייה של עד 20% בערכים המצוינים עקב טולרנסים ביצור וקשיות.

תכונות הקפיציות לסוג A

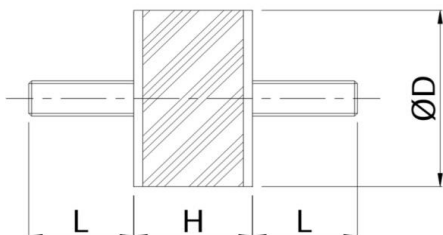

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
4,087.0	2,829.0	1,571.0	9.0	13,090.0	9,214.0	5,031.0	4.5	200/100
8,174.0	5,658.0	3,143.0	18.0	26,180.0	18,428.0	10,026.0	9.0	
12,261.0	8,487.0	4,714.0	27.0	39,270.0	27,642.0	15,093.0	13.5	

* יתכן סטייה של עד ±20% בערכים המצוינים עקב טולרנסים ביצור וקשיות.

