



תכונות הקפיציות לסוג B

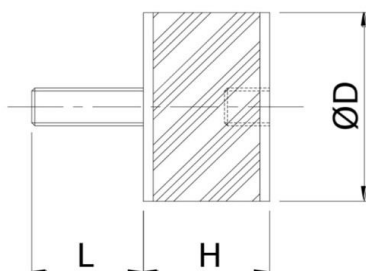

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
7.6	5.3	2.9	0.6	20.4	13.9	4.9	0.3	8/8
15.2	10.5	5.8	1.2	40.7	27.7	9.8	0.6	
22.8	15.8	8.7	1.8	61.0	41.6	14.7	0.9	
9.5	6.5	3.7	0.7	27.2	18.8	9.3	0.4	10/10
18.9	13.0	7.2	1.4	47.7	33.0	16.3	0.7	
28.4	19.5	10.9	2.1	75.0	51.8	25.6	1.1	
24.3	16.8	9.3	1.2	61.6	37.9	17.7	0.6	15/15
48.5	33.6	18.7	2.4	122.9	75.8	35.5	1.2	
72.7	50.5	28.0	3.6	184.8	113.4	53.1	1.8	
48.2	31.3	17.3	1.1	118.7	82.2	52.5	0.6	20/15
96.6	62.5	34.7	2.2	216.3	151.2	96.3	1.1	
145.2	93.8	52.0	3.3	335.0	233.1	149.1	1.7	
38.7	26.7	14.8	1.6	98.0	66.7	40.0	0.8	20/20
77.3	53.3	29.7	3.2	196.0	133.0	80.0	1.6	
116.0	80.0	44.5	4.8	294.0	200.0	120.0	2.4	
67.2	46.9	24.3	1.6	165.9	116.6	72.1	0.8	25/20
134.4	93.9	48.6	3.2	331.8	233.1	144.9	1.6	
201.6	140.7	72.9	4.8	497.7	349.7	216.3	2.4	
106.0	73.4	40.8	1.6	274.9	188.6	123.1	0.8	30/20
211.6	147.2	81.7	3.2	548.6	376.1	246.1	1.6	
318.6	219.7	123.1	4.8	822.3	564.7	369.2	2.4	
92.3	63.8	35.4	2.6	202.0	140.0	79.9	1.3	30/30
185.0	128.0	70.8	5.2	404.0	280.0	160.0	2.6	
277.0	191.0	106.0	7.8	607.0	420.0	240.0	3.9	

* יתכן סטייה של עד 20%± בערכים המצוינים עקב טולרנסים ביצור וקשיות.


תכונות הקפיציות לסוג B

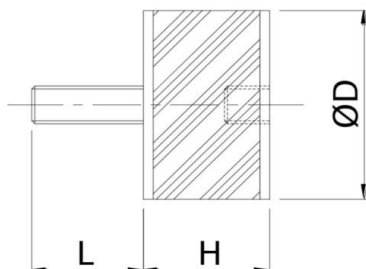

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
172.2	118.7	61.6	2.6	413.7	262.5	178.5	1.3	40/30
344.4	237.3	122.9	5.2	827.4	525.0	358.1	2.6	
516.6	357.0	184.8	7.8	1,241.1	786.5	536.6	3.9	
164.0	113.0	62.9	3.6	388.3	268.4	167.2	1.8	40/40
327.0	226.0	126.0	7.2	775.5	535.7	334.4	3.6	
491.0	340.0	189.0	10.8	1,163.8	804.1	501.6	5.4	
321.3	221.3	123.8	1.6	1,611.3	1,000.0	540.0	0.8	50/20
641.3	442.5	246.3	3.2	3,222.5	2,000.0	1,081.3	1.6	
962.5	663.8	370.0	4.8	4,832.5	3,000.0	1,621.3	2.4	
294.4	203.6	113.9	2.6	854.5	593.4	328.9	1.3	50/30
590.0	407.1	226.6	5.2	1,708.9	1,185.7	656.7	2.6	
884.4	610.7	340.4	7.8	2,563.4	1,779.1	985.6	3.9	
289.8	185.9	104.0	3.6	699.3	494.6	278.3	1.8	50/40
578.6	371.7	207.9	7.2	1,398.6	988.1	556.5	3.6	
867.3	557.6	311.9	10.8	2,097.9	1,482.6	834.8	5.4	
256.0	177.0	98.3	4.6	613.0	399.0	237.0	2.3	50/50
511.0	354.0	197.0	9.2	1,227.0	797.0	473.0	4.6	
767.0	531.0	295.0	13.8	1,840.0	1,196.0	710.0	6.9	
502.0	347.0	188.0	3.9	1,467.0	975.0	541.0	2.0	70/40
1,004.0	693.0	376.0	7.8	2,861.0	1,902.0	1,055.0	3.9	
1,506.0	1,040.0	563.0	11.7	4,328.0	2,878.0	1,595.0	5.9	
662.4	458.9	254.2	3.4	2,114.9	1,469.7	814.2	1.7	75/40
1,323.7	916.6	508.3	6.8	4,230.9	2,939.4	1,628.4	3.4	
1,986.1	1,375.4	763.6	10.2	6,345.7	4,410.3	2,442.6	5.1	

* יתכן סטייה של עד ±20% בערכים המצוינים עקב טולרנסים ביצור וקשיות.


תכונות הקפיציות לסוג B

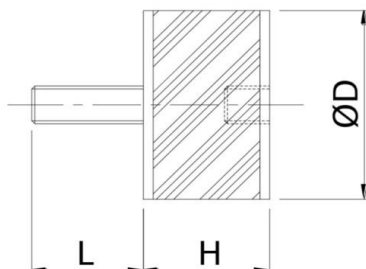

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
573.0	398.0	221.0	4.4	1,618.0	1,114.0	620.0	2.2	75/50
1,145.0	796.0	442.0	8.8	3,235.0	2,229.0	1,239.0	4.4	
1,718.0	1,195.0	663.0	13.2	4,853.0	3,343.0	1,858.0	6.6	
576.0	398.0	221.0	4.9	1,598.0	1,098.0	610.0	2.5	75/55
1,151.0	796.0	442.0	9.8	3,132.0	2,152.0	1,195.0	4.9	
1,727.0	1,194.0	663.0	14.7	4,730.0	3,250.0	1,804.0	7.4	
1,227.6	849.6	471.6	3.2	5,826.3	3,908.8	1,970.0	1.6	100/40
2,456.4	1,699.2	943.2	6.4	11,652.5	7,817.5	3,941.3	3.2	
3,684.0	2,548.8	1,414.8	9.6	17,478.8	11,726.3	5,911.3	4.8	
1,126.4	629.2	432.3	4.2	3,776.3	2,618.0	1,478.4	2.1	100/50
2,252.8	1,257.3	864.6	8.4	7,553.7	5,234.9	2,957.9	4.2	
3,379.2	1,886.5	1,296.9	12.6	11,330.0	7,852.9	4,436.3	6.3	
969.5	814.2	452.0	4.7	3,680.0	2,608.2	1,464.0	2.4	100/55
1,938.9	1,628.4	903.9	9.4	7,207.1	5,107.2	2,865.8	4.7	
2,908.4	2,442.6	1,355.9	14.1	10,887.1	7,715.4	4,329.8	7.1	
1,023.0	708.0	393.0	5.2	3,017.0	2,093.0	1,141.0	2.6	100/60
2,046.0	1,415.0	786.0	10.4	6,035.0	4,185.0	2,282.0	5.2	
3,068.0	2,123.0	1,179.0	15.6	9,052.0	6,278.0	3,422.0	7.8	
1,022.0	708.0	393.0	6.7	2,800.0	1,939.0	1,044.0	3.4	100/75
2,045.0	1,416.0	786.0	13.4	5,518.0	3,821.0	2,058.0	6.7	
3,067.0	2,124.0	1,178.0	20.1	8,319.0	5,761.0	3,102.0	10.1	
2,415.0	1,451.1	924.0	6.6	7,750.1	4,298.7	2,976.8	3.3	150/75
4,831.1	2,902.2	1,884.8	13.2	15,500.1	8,599.5	5,954.6	6.6	
7,246.1	4,353.3	2,827.7	19.8	23,249.1	12,899.3	8,931.3	9.9	

* יתכן סטייה של עד ±20% בערכים המצוינים עקב טולרנסים ביצור וקשיות.

תכונות הקפיציות לסוג B

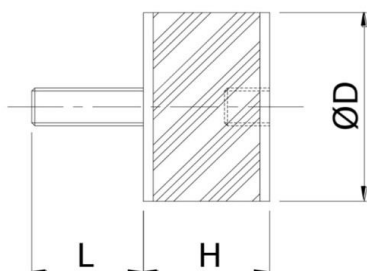

* תכונות תזוזה				* תכונות דחיסה				D / H (mm)
Shear Characteristics				Compression Characteristics				
Load (N) מאמץ			Deflection תזוזה (mm)	Load (N) מאמץ			Deflection דחיסה (mm)	
68°	57°	43°		68°	57°	43°		
4,087.0	2,829.0	1,571.0	9.0	13,090.0	9,214.0	5,031.0	4.5	200/100
8,174.0	5,658.0	3,143.0	18.0	26,180.0	18,428.0	10,026.0	9.0	
12,261.0	8,487.0	4,714.0	27.0	39,270.0	27,642.0	15,093.0	13.5	

* יתכן סטייה של עד ±20% בערכים המצוינים עקב טולרנסים ביצור וקשיות.

